

**TOLERANCE**  
**ZHEJIANG TOLERANCE**  
**YUEQING LIUSHI**  
Zhejiang Yueqing Liushi



- ◆ CABLE CLIP
- ◆ NYLON CABLE TIE
- ◆ PLASTIC ANCHOR
- CABLE GLAND**
- ◆ CABLE MARKER
- ◆ CABLE CLAMP
- ◆ CABLE PROTECTION
- ◆ STAINLESS STEEL CABLE TIE



浙江特伦斯电气有限公司  
E-mail : info@Chinatls.com  
Http : //www.chinatls.com Chinatls.en.alibaba.com



**ZHEJIANG**  
**TOLERANCE**  
**ELECTRIC CO.,LTD.**

## WHY CHOOSE US

- (1) core value: win-win, respect, integrity, reciprocity and mutual benefits.
- (2) we have rich experience in the field of wiring accessories industry and gather around higher popularity in oversea marketing.
- (3) our products have a complete range of specifications and steady good quality, to meet the need of different customers.
- (4) we adhere to the principle of win-win, built a professional electrical wiring accessories platform, we can provide anything whatever you want.



## PRODUCT ADVANTAGE

1. Quality is our Culture.
2. We insist on using NEW material—refused to add recyle material. —refused to add brightaner
3. we have our own factory, so any shape products can be full customed with low cost.
4. Quality  
We always put the product quality in the first place and strict quality control by third party.  
The equipment we adopted is the most advanced, so our production facilities and manufacturies are of the highest industry standard.



## INDUSTRY SOLUTION

1. Since established, we have been focusing on the research and development of our products
2. We adopt the most advanced equipment. so our production facilities and the level of manufacture are the highest industry standard.
3. When you receive the goods, test them. If you have any questions, contact us, we will offer the solution for you.



## SERVICE & SUPPORT

1. Our service exceeds all customer expectations and we have a professional team to provide customers with accurate, comprehensive and efficient service
2. Trustworthy quality is success partner, and we try to avoid after-sales issues.
3. 24 hours service online: Welcome to consult us, we will try our best to help you.

## OUR PROMISE

Quality is our Culture  
Delivery time guaranteed  
Superior service to satisfy customer request  
Insist win-win development

## COMPANY

### 特伦斯 Profile

Zhejiang Tolerance Electrical Co. Ltd. is a professional manufacturer of wiring accessories factory. After building our own factory, Tolerance focuses on the R & D, production and sale various kinds of wiring accessories all the time. The main products includes cable clips, expand plugs, self adhesive tie mount, saddle type tie mount, cable glands, spiral wrapping bands, stainless steel ties and so on. Our products are mainly applied in housing decoration wiring, wiring of building engineering, sets of electrical wiring, wiring of the shipbuilding industry, communication engineering wiring, light industry and heavy industry, meanwhile, the quality of our products enjoy great popularity at home and abroad.

Our company specializes in improving the quality of the products and meet with the requirement of different countries in order to satisfy with the different customer. Recent years, we establish a good cooperration relation with our main customers, such as, New Delhi of India, Dhaka of Bangladesh, Johannesburg of South Africa, Moscow of Russia, Incheon of South Korea, United Arab Emirates ect. In these countries, our products has occupied a certain market share in the local. At the same time, our products are recognized by these customers, no matter what its quality or appearance of internal and external packaging.

Tolerance will countine to improve the quality and service of products and commit to innovate technology in oreder to meet with the different requirement from globe market. In the future, our company is dedicating in carrying forward the spirit of "Tolerance, for wisdom and different".

[www.chinatls.com](http://www.chinatls.com)



**03-10 CABLE CLIPS SYSTEM**



**CABLE CLIPS SYSTEM**

- 03 K-type Circle Cable Clips
- 04 Circle cable clips
- 05 Hook Cable Clips
- 06 British Cable Clips
- 07 Flat cable clips
- 08 Pipe Clip
- 09 Hard/Soft Plastic Box Cable Clip
- 10 Paper Box Cable Clip
- 10 Other Brand Packaging

**NYLON CABLE TIES SYSTEM**



**NYLON CABLE TIES SYSTEM**

- 13-14 Self-Lock Type
- 15-16 Barb-Lock Type
- 17 Push Mount Type
- 18 Mountable Head Ties
- 18 Marker Ties
- 19 Releasable Type
- 19 Lashing Cable Tie
- 20 Double Head Cable Tie
- 20 Double Locking Cable Ties
- 20 Handcuff tie Cable Ties
- 21 Magic Cable ties
- 22 Instructions For Use

**PLASTIC ANCHOR SYSTEM**

- 25 Shark Head type Expand Plugs
- 26 Expand Plugs
- 27 Expand Plugs
- 28 Nylon Hammer Drive Anchor
- 29 Nylon Frame Fixing
- 30 Self-drill Plasterboard Plug
- 30 Zn Alloy Speed Anchors
- 31 Poly-Toggles
- 31 Hdpe Plastic Plugs
- 32 Paper Box
- 32 Green Paper Box
- 32 Blue Skylight Box
- 32 Purple Paper Box

23-32




**CABLE GLANDS SYSTEM**



**CABLE GLANDS SYSTEM**

- Nylon Cable Glands (Standard type) 34
- Nylon Cable Glands (Metric) M type 35
- Nylon Cable Glands MG/G/NPT 36
- Nylon Screw Plugs PG/M Type 37
- Spiral Cable Glands (PG/M type) 38
- Metal Cable Glands(Brass/S S 304/316) 39
- Metal Cable Glands(Brass/S S 304/316) 40
- Waterproof Junction Box (With Stopper) 41
- Waterproof Junction Box (Without Stopper) 42
- PE/PP/PA Corrugated Pipe 43
- Corrugated Conduit Connector 44
- Right Angle Connector of Corrugated Conduit 44
- Corrugated Pipe Fixed Stem 44

**CABLE MARKERS SYSTEM**

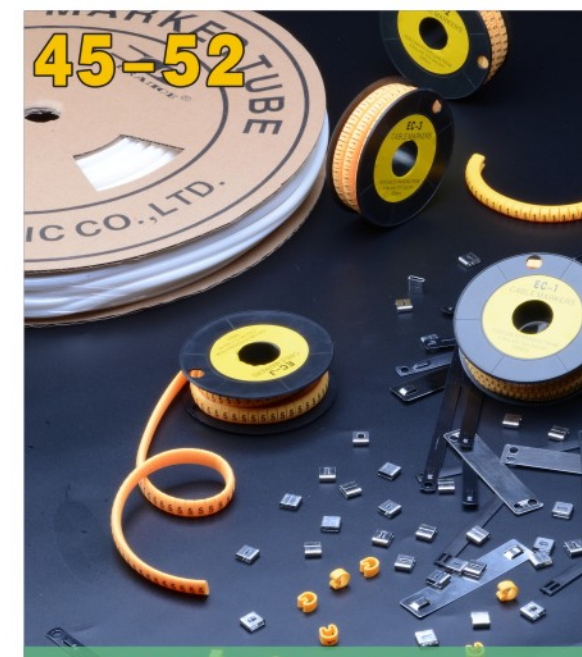

**CABLE MARKERS SYSTEM**

- 46 O type Marker Tube
- 47 Cable Markers
- 48 Color Cable Markers
- 49 MS type Color Coded Cable Markers
- 50 Marker Strip
- 50 Value pack Cable Markers
- 51 Stainless Steel Easy Read Markers
- 51 Stainless Steel Markers Carrier
- 52 Stainless Steel Tige24


**CABLE CLAMPS SYSTEM**



**CABLE CLAMPS SYSTEM**

- 54 Self Adhesive Tie Mount
- 54 Saddle Type Tie Mount
- 55 Adjustable Cable Clamp
- 55 Adjustable Cable Clamp
- 56 Cable Tie Holders
- 56 R type Cable Clamp
- 57 Rubber Tube Clamps
- 58 Vinyl Coated Tube Clamps
- 59 Twist Ties
- 59 Standoff Twist Tie
- 59 Locking Wire Saddle
- 60 Strain Relief Bushing
- 61 Grommet (open)
- 61 Hole Plug
- 62 Snap Bushing
- 62 Snap Bushing(Open)

**CABLE PROTECTION SYSTEM**

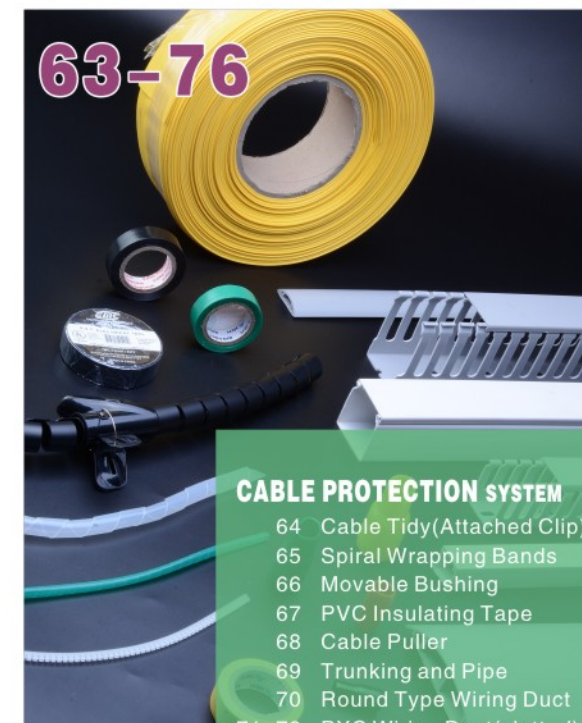

**CABLE PROTECTION SYSTEM**

- 64 Cable Tidy(Attached Clip)
- 65 Spiral Wrapping Bands
- 66 Movable Bushing
- 67 PVC Insulating Tape
- 68 Cable Puller
- 69 Trunking and Pipe
- 70 Round Type Wiring Duct
- 71-72 PXC Wiring Duct(slotted)
- 73-74 PZC Wiring Duct(solid)
- 75 Magic tube
- 75-76 Button tube

**STAINLESS STEEL CABLE TIES SYSTEM**



**STAINLESS STEEL CABLE TIES SYSTEM**

- 79-80 Ball-Lock Uncoated Ties
- 81-82 Ball-Lock Polyester Coated Ties
- 83-84 L Type Polyester Coated Ties
- 85 Ball-Lock PVC Coated Ties
- 86 Releasable Uncoated Ties
- 87 Ladder Single-Lock Un coated Ties
- 88 Un coated Bands-MPS Ties
- 88 PVC Coated Bands-MPSJ Series
- 89 Buckles
- 90 Hand Tools



PG




PG (Lengthening)

产品概述

- ◇ 螺牙规格: PG牙。
- ◇ 产品材质: A.C.E部分采用UL认可之尼龙PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料); B.D部分采用三元乙丙耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 保护等级: IP68
- ◇ 工作温度: 静态-40℃至100℃,或瞬间可耐热至120℃;动态-20℃至80℃,或瞬间可耐热至100℃。
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- ◇ 颜色种类: 黑色、灰色, 其它颜色可定做。

Product Overview

- ◇ Thread: PG thread
- ◇ Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: IP68
- ◇ Working temperature: -40℃ to 100℃
- ◇ Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- ◇ Colours: Black(RAL9005), gray(RAL7035), other color available upon request.

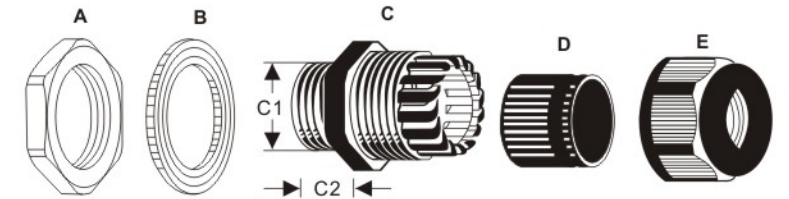

| 产品型号<br>Product Model | 适用电缆<br>Applicable to cable |       | 螺纹外径(C1)<br>Thread diameter | 螺纹长度(C2)<br>Thread length | 扳手直径<br>Wrench diameter |
|-----------------------|-----------------------------|-------|-----------------------------|---------------------------|-------------------------|
|                       | 常规型                         | 加厚型   |                             |                           |                         |
| PG7                   | 3-6.5                       | 2-5   | 12.5                        | 8                         | 16                      |
| PG9                   | 4-8                         | 2-6   | 15.2                        | 8                         | 19                      |
| PG11                  | 5-10                        | 3-7   | 18.6                        | 8                         | 22                      |
| PG13.5                | 6-12                        | 5-9   | 20.4                        | 10                        | 24                      |
| PG16                  | 10-14                       | 7-12  | 22.5                        | 10                        | 27                      |
| PG19                  | 12-16                       | 10-13 | 24                          | 10                        | 27                      |
| PG21                  | 13-18                       | 9-16  | 28.3                        | 10                        | 33                      |
| PG25                  | 16-21                       | 13-18 | 30                          | 11                        | 35                      |
| PG29                  | 18-25                       | 13-20 | 37                          | 12                        | 42                      |
| PG36                  | 22-32                       | 20-26 | 47                          | 14                        | 52                      |
| PG42                  | 32-38                       | 25-31 | 54                          | 14                        | 60                      |
| PG48                  | 37-44                       | 29-35 | 59.3                        | 15                        | 64                      |
| PG63                  | 42-50                       | 32-40 | 71                          | 28                        | 77                      |
| PG7L                  | 3-6.5                       | 2-5   | 12.5                        | 15                        | 16                      |
| PG9L                  | 4-8                         | 2-6   | 15.2                        | 15                        | 19                      |
| PG11L                 | 5-10                        | 3-7   | 18.6                        | 15                        | 22                      |
| PG13.5L               | 6-12                        | 5-9   | 20.4                        | 15                        | 24                      |
| PG16L                 | 10-14                       | 7-12  | 22.5                        | 15                        | 27                      |
| PG19L                 | 12-16                       | 10-13 | 24                          | 15                        | 27                      |
| PG21L                 | 13-18                       | 9-16  | 28.3                        | 15                        | 33                      |
| PG29L                 | 18-25                       | 13-20 | 37                          | 18                        | 42                      |
| PG36L                 | 22-32                       | 20-26 | 47                          | 18                        | 52                      |
| PG42L                 | 32-38                       | 25-31 | 54                          | 18                        | 60                      |
| PG48L                 | 37-44                       | 29-35 | 59.3                        | 18                        | 64                      |



# CABLE GLANDS SYSTEM

## Nylon Cable Glands (Metric) M type

◎ 尼龙电缆固定头 公制牙 M 型

# Pro-Fix

## Wiring Accessories

浙江特伦斯电气有限公司



M




M (Lengthening)

### 产品概述

- ◇ 螺牙规格: 公制牙 (Metric)。
- ◇ 产品材质: A.C.F 部分采用 UL 认可之尼龙 PA66 (防火等级 UL94V-2) 制成; (可定制 UL 认可的 V-0 防火等级尼龙原料); B.D 部分采用三元乙丙耐候橡胶制成。 (可定制耐寒、耐高温橡胶; 耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 保护等级: IP68-10
- ◇ 工作温度: 静态 -40°C 至 100°C, 或瞬间可耐热至 120°C; 动态 -20°C 至 80°C, 或瞬间可耐热至 100°C。
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- ◇ 颜色种类: 黑色、灰色, 其它颜色可定做。

### Product Overview

- ◇ Thread: Metric thread
- ◇ Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: IP68
- ◇ Working temperature: -40°C to 100°C
- ◇ Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- ◇ Colours: Black (RAL9005), gray (RAL7035), other color available upon request.

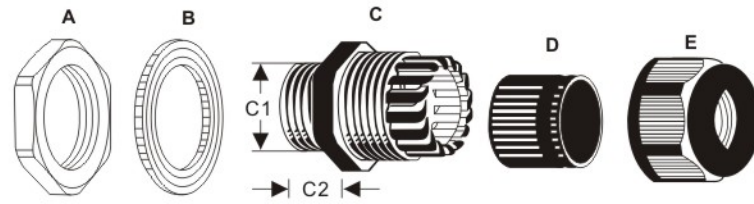

| 产品型号<br>Product Model | 适用电缆<br>Applicable to cable |       | 螺纹外径(C1)<br>Thread diameter | 螺纹长度(C2)<br>Thread length | 扳手直径<br>Wrench diameter |
|-----------------------|-----------------------------|-------|-----------------------------|---------------------------|-------------------------|
|                       | 常规型                         | 加厚型   |                             |                           |                         |
| M12x1.5               | 3-6.5                       | 2-5   | 12                          | 8                         | 16                      |
| M16x1.5               | 4-8                         | 2-6   | 16                          | 8                         | 19                      |
| M18x1.5               | 5-10                        | 3-7   | 18                          | 8                         | 22                      |
| M20x1.5               | 6-12                        | 5-9   | 20                          | 10                        | 24                      |
| M22x1.5               | 10-14                       | 7-12  | 22                          | 10                        | 27                      |
| M24x1.5               | 12-16                       | 10-13 | 24                          | 10                        | 27                      |
| M25x1.5               | 13-18                       | 9-16  | 25                          | 10                        | 33                      |
| M27x1.5               | 13-18                       | 9-16  | 27                          | 10                        | 33                      |
| M30x1.5               | 16-21                       | 13-18 | 30                          | 11                        | 35                      |
| M32x1.5               | 16-21                       | 13-18 | 32                          | 11                        | 35                      |
| M36x1.5               | 18-25                       | 13-20 | 36                          | 12                        | 42                      |
| M40x1.5               | 22-32                       | 20-26 | 40                          | 14                        | 52                      |
| M50x1.5               | 32-38                       | 25-31 | 50                          | 14                        | 60                      |
| M63x1.5               | 37-44                       | 29-35 | 63                          | 15                        | 64                      |
| M71x1.5               | 42-50                       | 32-40 | 71                          | 28                        | 77                      |
| M72x2                 | 42-50                       | 32-40 | 72                          | 30                        | 81                      |
| M75x2                 | 45-52                       | 50-60 | 75                          | 30                        | 85                      |
| M80x2                 | 52-60                       | 60-70 | 82                          | 30                        | 90                      |
| M88x2                 | 60-70                       |       | 88                          | 30                        | 90                      |
| M100x2                | 80-92                       |       | 100                         | 30                        | 110                     |
| M114x2                | 80-92                       |       | 114                         | 30                        | 110                     |
| M12x1.5L              | 3-6.5                       | 2-5   | 12                          | 15                        | 16                      |
| M16x1.5L              | 4-8                         | 2-6   | 16                          | 15                        | 19                      |
| M18x1.5L              | 5-10                        | 3-7   | 18                          | 15                        | 22                      |
| M20x1.5L              | 6-12                        | 5-9   | 20                          | 15                        | 24                      |
| M22x1.5L              | 10-14                       | 7-12  | 22                          | 15                        | 27                      |
| M25x1.5L              | 13-18                       | 9-16  | 25                          | 15                        | 33                      |
| M32x1.5L              | 16-21                       | 13-18 | 32                          | 18                        | 35                      |
| M40x1.5L              | 22-32                       | 20-26 | 40                          | 18                        | 52                      |
| M50x1.5L              | 32-38                       | 25-31 | 50                          | 18                        | 60                      |
| M63x1.5L              | 37-44                       | 29-35 | 63                          | 19                        | 64                      |

# CABLE GLANDS SYSTEM

## Nylon Cable Glands MG/G/NPT

◎ 尼龙电缆固定头 MG牙/G牙/NPT牙

# Pro-Fix

## Wiring Accessories

浙江特伦斯电气有限公司



MG



NPT"


G"

### 产品概述

- ◇ 螺牙规格: MG牙/G牙/NPT牙。
- ◇ 产品材质: A.C.E.F 部分采用 UL 认可之尼龙 PA66 (防火等级 UL94V-2) 制成; (可定制 UL 认可的 V-0 防火等级尼龙原料); B.D 部分采用三元乙丙耐候橡胶制成。 (可定制耐寒、耐高温橡胶; 耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 保护等级: IP68
- ◇ 工作温度: 静态 -40°C 至 100°C, 或瞬间可耐热至 120°C; 动态 -20°C 至 80°C, 或瞬间可耐热至 100°C。
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- ◇ 颜色种类: 黑色、灰色, 其它颜色可定做。

### Product Overview

- ◇ Thread: MG/G/NPT
- ◇ Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E. F parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: IP68
- ◇ Working temperature: -40°C to 100°C
- ◇ Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- ◇ Colours: Black (RAL9005), gray (RAL7035), other color available upon request.

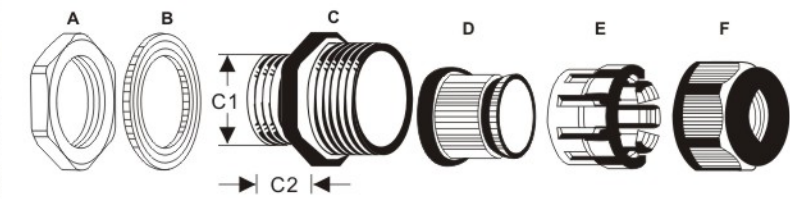

| 产品型号<br>Product Model | 适用电缆<br>Applicable to cable |       | 螺纹外径(C1)<br>Thread diameter | 螺纹长度(C2)<br>Thread length | 扳手直径<br>Wrench diameter |
|-----------------------|-----------------------------|-------|-----------------------------|---------------------------|-------------------------|
|                       | 常规型                         | 加厚型   |                             |                           |                         |
| MG12                  | 4.5-8                       | 3-5.3 | 12                          | 9                         | 19                      |
| MG16                  | 6-10                        | 4-7   | 16                          | 15                        | 22                      |
| MG20                  | 9-14                        | 6-11  | 20                          | 15                        | 27                      |
| MG25                  | 13-18                       | 10-16 | 25                          | 15                        | 33                      |
| MG32                  | 18-25                       | 15-22 | 32                          | 15                        | 41                      |
| MG40                  | 24-30                       | 20-25 | 40                          | 20                        | 50                      |
| MG50                  | 30-40                       | 26-32 | 50                          | 23                        | 62                      |
| MG63                  | 40-50                       | 38-46 | 63                          | 24                        | 75                      |
| G1/4"                 | 3-6.5                       | 2-5   | 13.1                        | 8                         | 16                      |
| G3/8"                 | 4-8                         | 2-6   | 16.6                        | 15                        | 19                      |
| G1/2"                 | 6-12                        | 5-9   | 20.9                        | 13                        | 24                      |
| G3/4"                 | 13-18                       | 9-16  | 26.4                        | 15                        | 33                      |
| G1"                   | 18-25                       | 13-20 | 33.2                        | 16                        | 41                      |
| G1 1/4"               | 18-25                       | 13-20 | 41.9                        | 18                        | 46                      |
| G1 1/2"               | 22-32                       | 20-26 | 47.8                        | 15                        | 52                      |
| G2"                   | 37-44                       | 29-35 | 59.6                        | 15                        | 64                      |
| NPT3/8"               | 4-8                         | 2-6   | 17                          | 15                        | 19                      |
| NPT1/2"               | 6-12                        | 5-9   | 21.2                        | 13                        | 24                      |
| NPT3/4"               | 13-18                       | 9-16  | 26.2                        | 15                        | 33                      |
| NPT1"                 | 18-25                       | 13-20 | 33.3                        | 16                        | 41                      |
| NPT1 1/4"             | 18-25                       | 13-20 | 42                          | 18                        | 46                      |
| NPT1 1/2"             | 22-32                       | 20-26 | 48                          | 15                        | 53                      |

**CABLE GLANDS SYSTEM**  
Nylon Screw Plugs PG/M Type  
◎塑料堵塞件 PG/M 型


**Pro-Fix**  
Wiring Accessories

浙江特伦斯电气有限公司



**产品概述**

- ◇ 产品材质: 尼龙塑料
- ◇ 保护等级: IP68 压力
- ◇ 工作温度: -40℃ 至 100℃
- ◇ 颜色种类: 灰色、黑色、其他颜色可定做

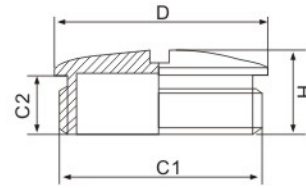

**Product Overview**

- ◇ Material: Nylon Pa66
- ◇ Protection degree: Ip68
- ◇ Working temperature: -40℃ to 100℃
- ◇ Application: Dust-proof for spare holes
- ◇ Colours: Black and gray

| 产品型号<br>Product Model | 螺纹外径(C1)<br>Thread diameter | 螺纹长度(C2)<br>Thread length | 主体尺寸(H)<br>Main Dimensions | 盖帽尺寸(D)<br>Cover Dimensions |
|-----------------------|-----------------------------|---------------------------|----------------------------|-----------------------------|
| PG7                   | 12.5                        | 8.5                       | 12.5                       | 15                          |
| PG9                   | 15.2                        | 8.5                       | 13                         | 19                          |
| PG11                  | 18.6                        | 9                         | 13                         | 22                          |
| PG13.5                | 20.4                        | 9                         | 13                         | 25                          |
| PG16                  | 22.5                        | 10.5                      | 15                         | 27                          |
| PG21                  | 28.3                        | 10.5                      | 15.5                       | 33                          |
| PG29                  | 37                          | 11.5                      | 16                         | 44                          |
| PG36                  | 47                          | 13.5                      | 18                         | 55                          |
| PG42                  | 54                          | 13.5                      | 18.5                       | 62                          |
| PG48                  | 59.3                        | 14.5                      | 19.5                       | 68                          |
| M12x1.5               | 12                          | 8.5                       | 12.5                       | 15                          |
| M16x1.5               | 16                          | 8.5                       | 13                         | 19                          |
| M18x1.5               | 18                          | 9                         | 13                         | 22                          |
| M20x1.5               | 20                          | 9                         | 13                         | 25                          |
| M22x1.5               | 22                          | 10.5                      | 15                         | 27                          |
| M25x1.5               | 25                          | 10.5                      | 15.5                       | 30                          |
| M27x1.5               | 27                          | 10.5                      | 15.5                       | 33                          |
| M32x1.5               | 32                          | 10.5                      | 16                         | 38                          |
| M40x1.5               | 40                          | 11.5                      | 16                         | 46                          |
| M50x1.5               | 50                          | 13.5                      | 18                         | 56                          |
| M63x1.5               | 63                          | 14                        | 19                         | 68                          |

**CABLE GLANDS SYSTEM**  
Spiral Cable Glands (PG/M type)  
◎防折弯式电缆接头 PG/M 型

**Pro-Fix**  
Wiring Accessories

浙江特伦斯电气有限公司




**产品概述**

- ◇ 螺牙规格: PG牙、公制牙(Metric)。
- ◇ 产品材质: A.C.E部分采用UL认可之尼龙PA66(防火等级UL94V-2)制成;(可定制UL认可的V-0防火等级尼龙原料); B.D部分采用三元乙丙耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 保护等级: Ip68
- ◇ 工作温度: 静态-40℃至100℃,或瞬间可耐热至120℃;动态-20℃至80℃,或瞬间可耐热至100℃。
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。
- ◇ 颜色种类: 黑色、灰色, 其它颜色可定做。

**Product Overview**

- ◇ Thread: PG, Metric.
- ◇ Materials: UL approved Nylon PA66 (Flammability UL 94V-2) for A. C. E parts, (Accept to make flammability UL 94V-0); EPDM rubber for B. D parts, (Also accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: IP68
- ◇ Working temperature: -40℃ to 100℃
- ◇ Features: The claws and seals of excellent design, sealing nut have a "click" sound and re-open, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.
- ◇ Colours: Black(RAL9005), gray(RAL7035), other color available upon request.

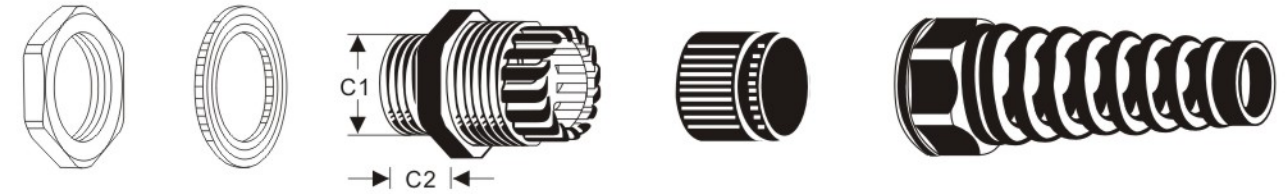

| 产品型号<br>Product Model | 适用电缆<br>Cable Range | 螺纹外径(C1)<br>Thread diameter | 螺纹长度(C2)<br>Thread length | 扳手直径<br>Wrench diameter |
|-----------------------|---------------------|-----------------------------|---------------------------|-------------------------|
| PG7                   | 3-6.5               | 12.5                        | 8                         | 16                      |
| PG7                   | 2-5                 | 12.5                        | 8                         | 16                      |
| PG9                   | 4-8                 | 15.2                        | 8                         | 19                      |
| PG9                   | 2-6                 | 15.2                        | 8                         | 19                      |
| PG11                  | 5-10                | 18.6                        | 8                         | 22                      |
| PG11                  | 3-7                 | 18.6                        | 8                         | 22                      |
| PG13.5                | 6-12                | 20.4                        | 9                         | 24                      |
| PG13.5                | 5-9                 | 20.4                        | 9                         | 24                      |
| PG16                  | 7-12                | 22.5                        | 10                        | 27                      |
| PG16                  | 10-14               | 22.5                        | 10                        | 27                      |
| PG21                  | 13-18               | 28.3                        | 10                        | 33                      |
| PG21                  | 9-16                | 28.3                        | 10                        | 33                      |
| M12x1.5               | 3-6.5               | 12                          | 8                         | 16                      |
| M12x1.5               | 2-5                 | 12                          | 8                         | 16                      |
| M16x1.5               | 4-8                 | 16                          | 8                         | 19                      |
| M16x1.5               | 2-6                 | 16                          | 8                         | 19                      |
| M18x1.5               | 5-10                | 18                          | 8                         | 22                      |
| M18x1.5               | 3-7                 | 18                          | 8                         | 22                      |
| M20x1.5               | 6-12                | 20                          | 9                         | 24                      |
| M20x1.5               | 5-9                 | 20                          | 9                         | 24                      |
| M22x1.5               | 10-14               | 22                          | 10                        | 27                      |
| M22x1.5               | 7-12                | 22                          | 10                        | 27                      |
| M25x1.5               | 13-18               | 25                          | 10                        | 33                      |
| M25x1.5               | 9-16                | 25                          | 10                        | 33                      |
| M27x1.5               | 13-18               | 27                          | 10                        | 33                      |
| M27x1.5               | 9-16                | 27                          | 10                        | 33                      |

# CABLE GLANDS SYSTEM

Metal Cable Glands(Brass/S S 304/316)

◎金属电缆防水接头

# Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司




### 产品概述

- ◇ 螺牙规格: 公制牙M型。
- ◇ 产品材质: A.C.F部分以黄铜镀镍(不锈钢304/316)制成, E部分以UL认可之尼龙PA66制成(防火等级UL94V-2), BD部分采用EPDM耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 工作温度: 静态-40℃至100℃,或瞬间可耐热至120℃;(可定制-60℃至220℃)
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

### Product Overview

- ◇ Thread: M thread .
- ◇ Brass(Stainless Steel 304/316) with nickel plated for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: Ip68
- ◇ Working temperature: -40℃ to 100℃
- ◇ Features: The claws and seals of excellent design, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

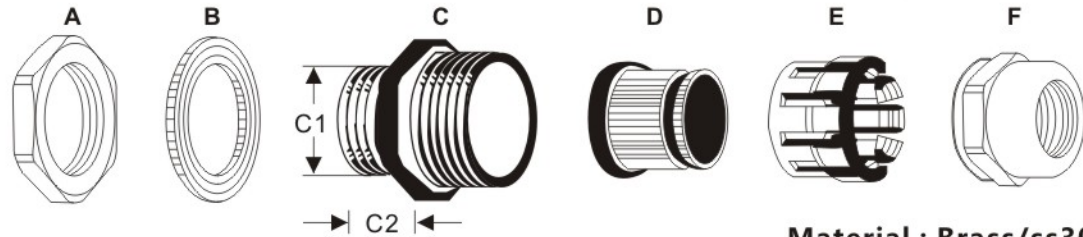

Material : Brass/ss304/ss316

| 产品规格<br>Item | 适用范围<br>Range | 螺纹外径<br>Thread O.D. | 螺纹长度<br>Thread Length GL | 接合长度<br>Joint length H | 扳手尺寸<br>Spanner Size |
|--------------|---------------|---------------------|--------------------------|------------------------|----------------------|
| M8x1         | 2-5           | 8                   | 5                        | 16                     | 12                   |
| M10x1        | 3-6.5         | 10                  | 6.5                      | 19                     | 14                   |
| M12x1.5      | 3-6.5         | 12                  | 6.5                      | 19                     | 14                   |
| M14x1.5      | 4-8           | 12                  | 8                        | 19                     | 17                   |
| M16x1.5      | 4-8           | 14                  | 8                        | 19                     | 17                   |
| M18x1.5      | 4-8           | 16                  | 8                        | 20                     | 18                   |
| M20x1.5      | 5-10          | 16                  | 8                        | 21                     | 20                   |
| M22x1.5      | 5-10          | 18                  | 8                        | 21                     | 20                   |
| M24x1.5      | 6-12          | 18                  | 8                        | 22                     | 22                   |
| M25x1.5      | 6-12          | 20                  | 8                        | 22                     | 22                   |
| M27x1.5      | 10-14         | 20                  | 8                        | 23                     | 24                   |
| M28x1.5      | 10-14         | 22                  | 8                        | 23                     | 24                   |
| M30x1.5      | 10-14         | 24                  | 9                        | 25                     | 24/27                |
| M32x1.5      | 10-14         | 25                  | 9                        | 25                     | 24/27                |
| M33x1.5      | 12-16         | 25                  | 9                        | 27                     | 27                   |
| M36x1.5      | 13-18         | 25                  | 9                        | 27                     | 30/27                |
| M40x1.5      | 13-18         | 27                  | 9                        | 27                     | 30                   |
| M42x1.5      | 13-18         | 28                  | 9                        | 27                     | 30                   |
| M47x1.5      | 13-18         | 30                  | 9                        | 29                     | 30/32                |
| M48x1.5      | 15-22         | 32                  | 10                       | 29                     | 35                   |
| M50x1.5      | 18-25         | 32                  | 10                       | 31                     | 40                   |
| M54x1.5      | 15-22         | 33                  | 10                       | 29                     | 35                   |
| M54x1.5      | 18-25         | 36                  | 10                       | 31                     | 40                   |
| M60x1.5      | 18-25         | 37                  | 10                       | 31                     | 40                   |
| M63x1.5      | 18-25         | 40                  | 11                       | 31                     | 40/45                |
| M64x2        | 22-30         | 40                  | 11                       | 35                     | 45                   |
| M64x2        | 22-30         | 42                  | 11                       | 35                     | 45                   |
| M72x2        | 25-33         | 47                  | 11                       | 37                     | 50                   |
| M72x2        | 25-33         | 48                  | 11                       | 37                     | 50/52                |
| M75x2        | 32-38         | 50                  | 13                       | 37                     | 57/55                |
| M75x2        | 32-38         | 54                  | 13                       | 38                     | 57                   |
| M80x2        | 37-44         | 60                  | 14                       | 38                     | 64                   |
| M80x2        | 37-44         | 63                  | 14                       | 38                     | 64/68                |
| M88x2        | 37-44         | 64                  | 14                       | 38                     | 64/68                |
| M88x2        | 42-52         | 72                  | 16                       | 42                     | 78                   |
| M88x2        | 48-58         | 72                  | 16                       | 42                     | 78                   |
| M100x2       | 42-52         | 75                  | 16                       | 42                     | 78/80                |
| M100x2       | 55-60         | 80                  | 18                       | 45                     | 88                   |
| M100x2       | 65-70         | 88                  | 18                       | 45                     | 94                   |
| M100x2       | 78-84         | 100                 | 20                       | 53                     | 110                  |

# CABLE GLANDS SYSTEM

Metal Cable Glands(Brass/S S 304/316)

◎金属电缆防水接头

# Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司




### 产品概述

- ◇ 螺牙规格: 德制PG牙/G牙/NPT牙。
- ◇ 产品材质: A.C.F部分以黄铜镀镍(不锈钢304/316)制成, E部分以UL认可之尼龙PA66制成(防火等级UL94V-2), BD部分采用EPDM耐候橡胶制成。(可定制耐寒、耐高温橡胶;耐高酸碱、耐化学与抗腐蚀橡胶)。
- ◇ 工作温度: 静态-40℃至100℃,或瞬间可耐热至120℃;(可定制-60℃至220℃)
- ◇ 产品特性: 特殊夹紧爪与夹紧圈之设计, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、抗盐、耐弱酸、酒精、油、油脂及一般溶剂。

### Product Overview

- ◇ Thread: PG/G/NPT thread
- ◇ Brass(Stainless Steel 304/316) with nickel plated for A. C. F parts, UL approved Nylon PA66 (Flammability UL 94V-2) for E part, EPDM rubber for B. D parts. (Accept to make super rubber: resist high temperature rubber, resist strong acid/alkali, etc).
- ◇ Protection degree: Ip68
- ◇ Working temperature: -40℃ to 100℃
- ◇ Features: The claws and seals of excellent design, can hold cable firmly and have a wider cable range. Resistant to salt water, weak acid, alcohol, oil, grease and common solvency.

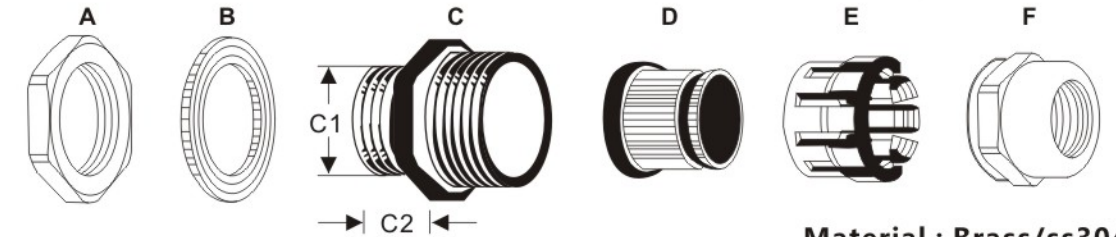

Material : Brass/ss304/ss316

| 产品规格<br>Item | 适用范围<br>Range | 螺纹外径<br>Thread O.D. | 螺纹长度<br>Thread Length GL | 接合长度<br>Joint length H | 扳手尺寸<br>Spanner Size |
|--------------|---------------|---------------------|--------------------------|------------------------|----------------------|
| PG7          | 3-6.5         | 12.5                | 7                        | 19                     | 14/15                |
| PG9          | 4-8           | 15.2                | 8                        | 20                     | 17/18                |
| PG11         | 5-10          | 18.6                | 8                        | 21                     | 20/21                |
| PG13.5       | 6-12          | 20.4                | 8                        | 22                     | 22/23                |
| PG16         | 10-14         | 22.5                | 9                        | 23                     | 24/25                |
| PG19         | 10-14         | 25.0                | 9                        | 25                     | 24/27                |
| PG21         | 13-18         | 28.3                | 9                        | 27                     | 30                   |
| PG25         | 15-22         | 32.0                | 10                       | 29                     | 35                   |
| PG29         | 18-25         | 37.0                | 11                       | 31                     | 40                   |
| PG36         | 25-33         | 47.0                | 11                       | 37                     | 50                   |
| PG42         | 32-38         | 54.0                | 13                       | 38                     | 57                   |
| PG48         | 37-44         | 59.3                | 14                       | 38                     | 64                   |
| PG63         | 42-52         | 72.0                | 16                       | 42                     | 78                   |
| G 1/2"       | 6-12          | 20.9                | 8                        | 22                     | 22/23                |
| NPT 1/2"     | 6-12          | 21.2                | 8                        | 22                     | 22/23                |
| G 3/4"       | 13-18         | 26.4                | 9                        | 25                     | 30                   |
| NPT 3/4"     | 13-18         | 26.5                | 9                        | 25                     | 30                   |
| G 1"         | 18-25         | 33.2                | 10                       | 29                     | 40                   |
| NPT 1"       | 18-25         | 33.2                | 10                       | 29                     | 40                   |
| G 1-1/4"     | 25-33         | 41.9                | 11                       | 35                     | 50                   |
| NPT 1-1/4"   | 25-33         | 41.9                | 11                       | 35                     | 50                   |
| G 1-1/2"     | 32-38         | 47.8                | 12                       | 37                     | 57/55                |
| NPT 1-1/2"   | 32-38         | 48.0                | 12                       | 37                     | 57/55                |
| G 2"         | 37-44         | 59.6                | 14                       | 38                     | 65                   |
| NPT 2"       | 37-44         | 60.0                | 14                       | 38                     | 65                   |
| G 2-1/2"     | 42-52         | 75.1                | 16                       | 42                     | 77                   |
| NPT 2-1/2"   | 42-52         | 72.6                | 16                       | 42                     | 77                   |
| G 3"         | 65-70         | 87.8                | 18                       | 45                     | 94                   |
| NPT 3"       | 65-70         | 88.6                | 18                       | 45                     | 94                   |




产品概述

- ◇壳体材料: ABS
- ◇孔塞材料: PVC
- ◇材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性的优良、表面光泽性好等特点。
- ◇认证: CE、ROHS
- ◇用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼, 石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备, 污水处理设施、环境公害设施等。
- ◇安装方式: 1.内部安装:盒子内部有供线路板或DIN轨道元件安装的凸台; 2.外部安装:可通过盒体底部的安装孔直接固定于墙面(可通过盒子的四个角,直接用螺丝或钉子固定在墙上或板子上。)
- ◇进出线孔: 防水盒可以根据电线大小在现有孔塞上选择使用, 或配套防水夹紧接头, 达到防水最佳效果。

Product Overview

- ◇Body Material: ABS
- ◇Stopper Material: PVC
- ◇Material Feature: can resistant the stock, heat, low temperature, and chemicals. Excellent electrical properties, good surface gloss
- ◇Certification: CE ROHS
- ◇Usage: Suitable for indoor and outdoor electrical, communications, fire equipment, steel smelting, Petrochemical, electronics, electric power, railway, construction site, mining field, airport, hotel, ship, large factory, coastal factory, unloading terminal equipment Sewage treatment facilities, environmental pollution facilities and so on.
- ◇Installation method: 1. inside of the box have the circuit board or the rails are mounted on the boss  
2. External installation: can use the hole of the bottoms of the box directly fixed on the wall (can by the four angles, use the screw or nail fixed the box on the wall or board.
- ◇Entry hole: Waterproof Junction Box can be selected according to the size of the wire in the existing hole plug, or with set the waterproof clamping joints, to achieve the best waterproof effect.

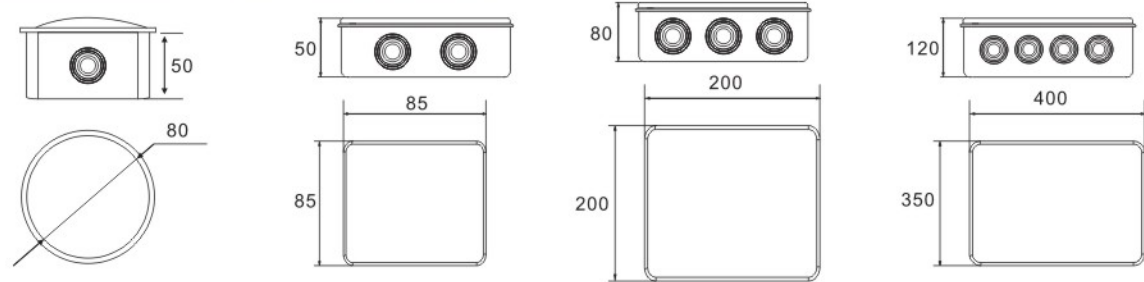

| 型号<br>Model Code | 孔数<br>Hole Qty. | 孔径(mm)<br>Hole Size | IP | 毛重(KG)<br>G.Weight | 净重(KG)<br>N.Weight | 装箱数(只)<br>Qty/Carton | 外箱尺寸(cm)<br>Carton Dimension |
|------------------|-----------------|---------------------|----|--------------------|--------------------|----------------------|------------------------------|
| 50 x 50          | 4               | 25                  | 55 | 13.5               | 12.3               | 300                  | 46 x 38 x 51                 |
| 80 x 50          | 4               | 25                  | 55 | 14.7               | 13.4               | 240                  | 53 x 35 x 62                 |
| 85 x 85 x 50     | 7               | 25                  | 55 | 17.2               | 16.0               | 200                  | 53 x 41 x 53                 |
| 100 x 100 x 70   | 7               | 25                  | 65 | 14.9               | 13.5               | 100                  | 62 x 49 x 35                 |
| 150 x 110 x 70   | 10              | 25                  | 65 | 15.1               | 13.8               | 60                   | 67 x 33 x 46.5               |
| 150 x 150 x 70   | 8               | 25                  | 65 | 16.3               | 15.0               | 60                   | 84.5 x 34 x 45               |
| 200 x 100 x 70   | 8               | 25                  | 65 | 16.6               | 15.3               | 60                   | 61 x 46 x 42                 |
| 200 x 155 x 80   | 10              | 36                  | 65 | 14.5               | 13.2               | 40                   | 69.5 x 43.5 x 42             |
| 200 x 200 x 80   | 12              | 36                  | 65 | 18.0               | 16.6               | 40                   | 90 x 46 x 40.5               |
| 255 x 200 x 80   | 12              | 36                  | 65 | 21.9               | 20.1               | 40                   | 55 x 45 x 78.5               |
| 255 x 200 x 120  | 12              | 36                  | 65 | 21.9               | 20.1               | 30                   | 64 x 55 x 62                 |
| 300 x 250 x 120  | 12              | 36                  | 65 | 20.3               | 18.4               | 20                   | 61.5 x 55.5 x 63             |
| 400 x 350 x 120  | 16              | 36                  | 65 | 15.0               | 13.3               | 10                   | 74.5 x 42.5 x 61.5           |




产品概述

- ◇壳体材料: ABS
- ◇材料特性: 抗冲击性、耐热性、耐低温性、耐化学药品性及电气性能的优良、表面光泽性好等特点。
- ◇认证: CE、ROHS
- ◇用途: 适用于室内、室外电气、通信、消防设备、钢铁冶炼, 石油化工、电子、电力、铁路、建筑工地、采矿场、机场、宾馆、船舶、大型工厂、沿海工厂、卸货码头设备, 污水处理设施、环境公害设施等。
- ◇安装方式: 1.内部安装: 盒子内部有供线路板或DIN轨道元件安装凸台; 2.外部安装: 可通过盒体底部的安装孔直接固定于墙面(可通过盒子的四个角, 直接用螺丝或钉子固定在墙上或板子上。)
- ◇进出线孔: 防水盒上已经有孔印, 客户可以按自己要求敲落随意一个孔及全部, 配套防水夹紧接头, 达到防水最佳效果。

Product Overview

- ◇Body Material: ABS
- ◇Material Feature: can resistant the stock, heat, low temperature, and chemicals. Excellent electrical properties, good surface gloss
- ◇Certification: CE ROHS
- ◇Installation method: 1. inside of the box have the circuit board or the rails are mounted on the boss  
2. External installation: can use the hole of the bottoms of the box directly fixed on the wall (can by the four angles, use the screw or nail fixed the box on the wall or board.
- ◇Entry hole: waterproof Junction Box has hole printed, customer can depend self requirements knock down a hole or all holes, with set the waterproof clamping joints, to achieve the best waterproof effect.
- Suitable for indoor and outdoor electrical, communications, fire equipment, steel smelting, Petrochemical, electronics, electric power, railway, construction site, mining field, airport, hotel, ship, large factory, coastal factory, unloading terminal equipment Sewage treatment facilities, environmental pollution facilities and so on.

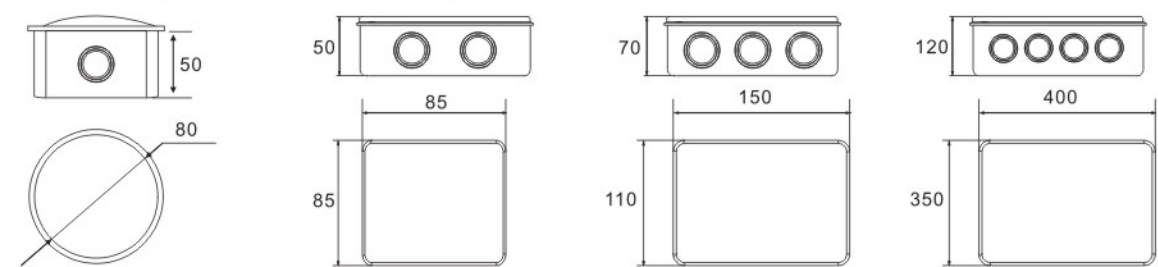

| 型号<br>Model Code | 孔数<br>Hole Qty. | 孔径(mm)<br>Hole Size | IP | 毛重(KG)<br>G.Weight | 净重(KG)<br>N.Weight | 装箱数(只)<br>Qty/Carton | 外箱尺寸(cm)<br>Carton Dimension |
|------------------|-----------------|---------------------|----|--------------------|--------------------|----------------------|------------------------------|
| 50 x 50          | 4               | 25                  | 55 | 12.9               | 11.7               | 300                  | 45.5 x 37.5 x 51             |
| 80 x 50          | 4               | 25                  | 55 | 13.1               | 11.8               | 240                  | 53 x 35 x 62                 |
| 85 x 85 x 50     | 7               | 25                  | 55 | 15.6               | 14.4               | 200                  | 45 x 37 x 53                 |
| 100 x 100 x 70   | 7               | 25                  | 65 | 13.9               | 12.5               | 100                  | 57 x 46 x 35                 |
| 150 x 110 x 70   | 10              | 25                  | 65 | 13.6               | 12.3               | 60                   | 62 x 31.5 x 46.5             |
| 150 x 150 x 70   | 8               | 25                  | 65 | 15.6               | 14.3               | 60                   | 79 x 31 x 46                 |
| 200 x 100 x 70   | 8               | 25                  | 65 | 15.6               | 14.3               | 60                   | 57 x 43 x 42                 |
| 200 x 155 x 80   | 10              | 36                  | 65 | 13.3               | 12.0               | 40                   | 64.5 x 40.5 x 41             |
| 200 x 200 x 80   | 12              | 36                  | 65 | 16.0               | 14.4               | 40                   | 85 x 43 x 40.5               |
| 255 x 200 x 80   | 12              | 36                  | 65 | 19.8               | 18.0               | 40                   | 81 x 51.5 x 41               |
| 255 x 200 x 120  | 12              | 36                  | 65 | 19.8               | 18.0               | 30                   | 62 x 53 x 62                 |
| 300 x 250 x 120  | 12              | 36                  | 65 | 19.7               | 17.8               | 20                   | 61 x 52 x 61.5               |
| 400 x 350 x 120  | 16              | 36                  | 65 | 14.8               | 13.1               | 10                   | 72 x 41 x 61.5               |



# CABLE GLANDS SYSTEM PE/PP/PA Corrugated Pipe

◎PE/PP/PA波纹管

# Pro-Fix Wiring Accessories

浙江特伦斯电气有限公司





### 产品概述

- ◇ 产品材质: PE/PP/PA聚丙烯
- ◇ 工作温度: -30℃~+100℃短时可达+110℃
- ◇ 结构: 内部和外表均为波浪型;
- ◇ 颜色: 黑色(根据需要可开口)
- ◇ 特性: 柔韧性好, 表面光泽、耐化学腐蚀。
- ◇ 应用领域: 重要用于汽车配线专用、也可用于机床机械, 自动化仪表, 电机马达, 保护电缆不受外力磨损及绝缘。
- ◇ 使用方法: 将电线电缆插入管内, 在配上系列软管接头对应的型号使用即可。

### Product Overview

- ◇ Product Material: PE/PP/PA
- ◇ Working temperature: -30℃~+100℃, instantaneous to +110℃
- ◇ Structure: Both inside and outside look wavy
- ◇ Color: Black, other colors can be customized
- ◇ Feature: Good flexibility, surface glossy, Anti-chemical
- ◇ Application: Main used in automotive wiring, can also be used for machine tools, automated instruments, motor motors, protective cables from external wear and insulation
- ◇ Usage: Put the wires/cables through the pipes before fitting correspondent type of joints

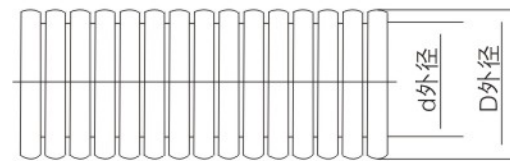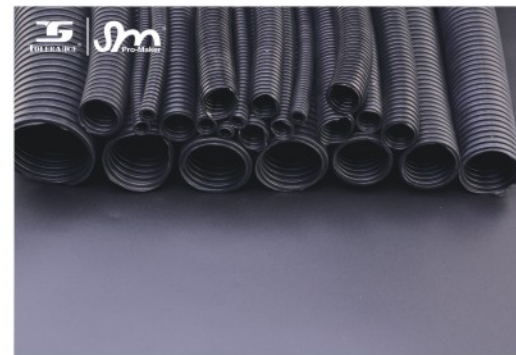

### ◎PE/PP/PA波纹管

| 型号<br>Model   | 规格<br>Specification | 内径×外径 (mm)<br>Internal and Outside diameter(mm) | 弯曲半径 (mm)<br>Bending radius(mm) | 包装单位 (mm)<br>Package(mm) |
|---------------|---------------------|---|---------------------------------|--------------------------|
| PE/PP/PA-7    | AD7                 | 4.5×7.0   | 16                              | 200                      |
| PE/PP/PA-10   | AD10                | 7.0×10  | 16                              | 100                      |
| PE/PP/PA-11   | AD11                | 8.5×11  | 16                              | 200                      |
| PE/PP/PA-13   | AD13                | 10×13   | 20                              | 100                      |
| PE/PP/PA-15.8 | AD15.8              | 12×15.8   | 30                              | 100                      |
| PE/PP/PA-18.5 | AD18.5              | 14.3×18.5                                       | 40                              | 100                      |
| PE/PP/PA-21.2 | AD21.2              | 17×21.2   | 45                              | 100                      |
| PE/PP/PA-25   | AD25                | 21×25   | 45                              | 100                      |
| PE/PP/PA-28.5 | AD28.5              | 23×28.5   | 50                              | 50                       |
| PE/PP/PA-34.5 | AD34.5              | 29×34.5   | 60                              | 50                       |
| PE/PP/PA-42.5 | AD42.5              | 36×42.5   | 70                              | 50                       |
| PE/PP/PA-54.5 | AD54.5              | 48×54.5   | 90                              | 25                       |

# CABLE GLANDS SYSTEM Corrugated Conduit Connector

◎波纹管接头


# Pro-Fix Wiring Accessories

浙江特伦斯电气有限公司



### Product Overview

- ◇ Material: Nylon (Polyamide)
- ◇ Thread Size: Metric/PG thread
- ◇ Operating temperature: 40 ~ + 110 °C
- ◇ Colour: Black, other colors can be customized
- ◇ Feature: Special design for internal latching and body, installation and uninstallation only need to be inserted and unplugged without tools.
- ◇ Usage: corrugated conduit connector is a matching product of the flexible corrugated conduit, It can access the device box and also be based on the choice of threaded access to the internal and external thread of the electrical equipment, Just plug the hose into the connector.

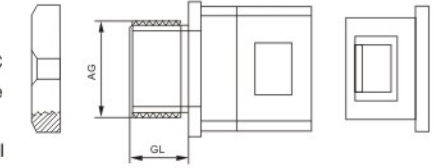

AD7 / AD10 / AD11 / AD13 / AD15.8 / AD18.5 / AD21.2 / AD25 / AD28.5 / AD34.5 / AD42.5 / AD54.5


# CABLE GLANDS SYSTEM Right Angle Connector of Corrugated Conduit

◎波纹管直角接头



### Product Overview

- ◇ Material: Nylon (Polyamide)
- ◇ Thread Size: Metric/PG thread
- ◇ Operating temperature: -40 ~ + 110 °C
- ◇ Colour: Black, other colors can be customized
- ◇ Characteristic: Internal locking and body special design, installation and uninstallation only need to be inserted and unplugged without tools.
- ◇ Usage: right angle hose connector is a matching product of the flexible corrugated conduit, It can access the device box and also be based on the choice of threaded access to the internal and external thread of the electrical equipment, Just plug the hose into the connector.

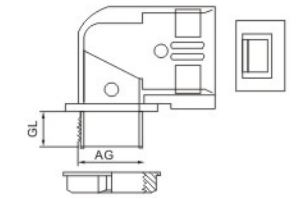

AD7 / AD10 / AD11 / AD13 / AD15.8 / AD18.5 / AD21.2 / AD25 / AD28.5 / AD34.5 / AD42.5 / AD54.5


# CABLE GLANDS SYSTEM Corrugated Pipe Fixed Stent

◎波纹管固定支架



### Product Overview

- ◇ Product Code: VH
- ◇ Material: Nylon (Polyamide)
- ◇ Temperature: -40℃~+110℃
- ◇ Color: Black, other colors are also available.
- ◇ The range of supply: two types, with cover and no cover
- ◇ Feature: VH is the matching product of the hose, it is used for fixing hose, cable and soon

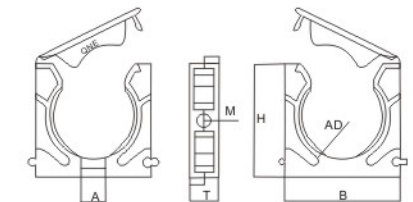

AD7 / AD10 / AD11 / AD13 / AD15.8 / AD18.5 / AD21.2 / AD25 / AD28.5 / AD34.5 / AD42.5 / AD54.5