



- ◆ CABLE CLIP
- ◆ NYLON CABLE TIE
- ◆ PLASTIC ANCHOR
- ◆ CABLE GLAND
- ◆ CABLE MARKER
- ◆ CABLE CLAMP
- ◆ CABLE PROFECTION

STAINLESS STEEL CABLE TIE

TOLERANCE
ZHEJIANG YUEQING
JIANG LIUSHI
Zhejiang Yueqing Liushi



浙江特伦斯电气有限公司
E-mail : info@Chinatls.com
Http : //www.chinatls.com Chinatls.en.alibaba.com



ZHEJIANG
TOLERANCE
ELECTRIC CO.,LTD.

WHY CHOOSE US

- (1) core value: win-win, respect, integrity, reciprocity and mutual benefits.
- (2) we have rich experience in the field of wiring accessories industry and gather around higher popularity in oversea marketing.
- (3) our products have a complete range of specifications and steady good quality, to meet the need of different customers.
- (4) we adhere to the principle of win-win, built a professional electrical wiring accessories platform, we can provide anything whatever you want.



PRODUCT ADVANTAGE

1. Quality is our Culture.
2. We insist on using NEW material—refused to add recyle material. —refused to add brightaner
3. we have our own factory, so any shape products can be full customed with low cost.
4. Quality
We always put the product quality in the first place and strict quality control by third party.
The equipment we adopted is the most advanced, so our production facilities and manufactories are of the highest industry standard.



INDUSTRY SOLUTION

1. Since established, we have been focusing on the research and development of our products
2. We adopt the most advanced equipment. so our production facilities and the level of manufacture are the highest industry standard.
3. When you receive the goods, test them. If you have any questions, contact us, we will offer the solution for you.



SERVICE & SUPPORT

1. Our service exceeds all customer expectations and we have a professional team to provide customers with accurate, comprehensive and efficient service
2. Trustworthy quality is success partner, and we try to avoid after-sales issues.
3. 24 hours service online: Welcome to consult us, we will try our best to help you.

OUR PROMISE

Quality is our Culture
Delivery time guaranteed
Superior service to satisfy customer request
Insist win-win development

COMPANY

特伦斯 Profile

Zhejiang Tolerance Electrical Co. Ltd. is a professional manufacturer of wiring accessories factory. After building our own factory, Tolerance focuses on the R & D, production and sale various kinds of wiring accessories all the time. The main products includes cable clips, expand plugs, self adhesive tie mount, saddle type tie mount, cable glands, spiral wrapping bands, stainless steel ties and so on. Our products are mainly applied in housing decoration wiring, wiring of building engineering, sets of electrical wiring, wiring of the shipbuilding industry, communication engineering wiring, light industry and heavy industry, meanwhile, the quality of our products enjoy great popularity at home and abroad.

Our company specializes in improving the quality of the products and meet with the requirement of different countries in order to satisfy with the different customer. Recent years, we establish a good cooperration relation with our main customers, such as, New Delhi of India, Dhaka of Bangladesh, Johannesburg of South Africa, Moscow of Russia, Incheon of South Korea, United Arab Emirates ect. In these countries, our products has occupied a certain market share in the local. At the same time, our products are recognized by these customers, no matter what its quality or appearance of internal and external packaging.

Tolerance will countine to improve the quality and service of products and commit to innovate technology in oreder to meet with the different requirement from globe market. In the future, our company is dedicating in carrying forward the spirit of "Tolerance, for wisdom and different".

www.chinatls.com



03-10 CABLE CLIPS SYSTEM



CABLE CLIPS SYSTEM

- 03 K-type Circle Cable Clips
- 04 Circle cable clips
- 05 Hook Cable Clips
- 06 British Cable Clips
- 07 Flat cable clips
- 08 Pipe Clip
- 09 Hard/Soft Plastic Box Cable Clip
- 10 Paper Box Cable Clip
- 10 Other Brand Packaging

NYLON CABLE TIES SYSTEM



11-22

NYLON CABLE TIES SYSTEM

- 13-14 Self-Lock Type
- 15-16 Barb-Lock Type
- 17 Push Mount Type
- 18 Mountable Head Ties
- 18 Marker Ties
- 19 Releasable Type
- 19 Lashing Cable Tie
- 20 Double Head Cable Tie
- 20 Double Locking Cable Ties
- 20 Handcuff tie Cable Ties
- 21 Magic Cable ties
- 22 Instructions For Use

PLASTIC ANCHOR SYSTEM

- 25 Shark Head type Expand Plugs
- 26 Expand Plugs
- 27 Expand Plugs
- 28 Nylon Hammer Drive Anchor
- 29 Nylon Frame Fixing
- 30 Self-drill Plasterboard Plug
- 30 Zn Alloy Speed Anchors
- 31 Poly-Toggles
- 31 Hdpe Plastic Plugs
- 32 Paper Box
- 32 Green Paper Box
- 32 Blue Skylight Box
- 32 Purple Paper Box

23-32



CABLE GLANDS SYSTEM




33-44

CABLE GLANDS SYSTEM

- Nylon Cable Glands (Standard type) 34
- Nylon Cable Glands (Metric) M type 35
- Nylon Cable Glands MG/G/NPT 36
- Nylon Screw Plugs PG/M Type 37
- Spiral Cable Glands (PG/M type) 38
- Metal Cable Glands(Brass/S S 304/316) 39
- Metal Cable Glands(Brass/S S 304/316) 40
- Waterproof Junction Box (With Stopper) 41
- Waterproof Junction Box (Without Stopper) 42
- PE/PP/PA Corrugated Pipe 43
- Corrugated Conduit Connector 44
- Right Angle Connector of Corrugated Conduit 44
- Corrugated Pipe Fixed Stem 44

CABLE MARKERS SYSTEM

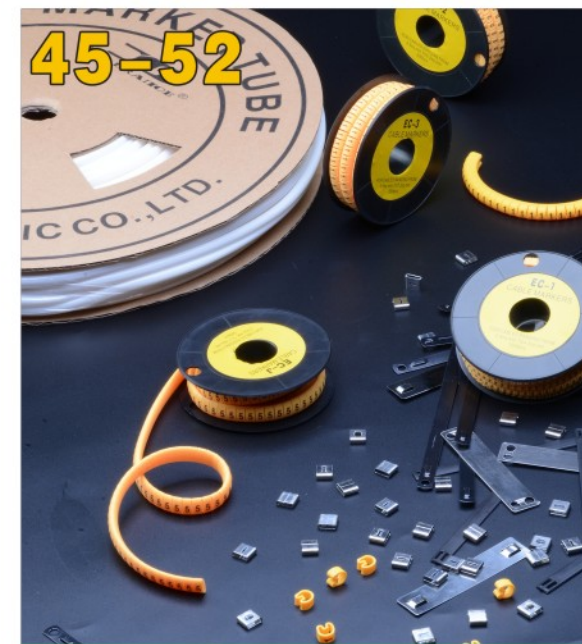

45-52

CABLE MARKERS SYSTEM

- 46 O type Marker Tube
- 47 Cable Markers
- 48 Color Cable Markers
- 49 MS type Color Coded Cable Markers
- 50 Marker Strip
- 50 Value pack Cable Markers
- 51 Stainless Steel Easy Read Markers
- 51 Stainless Steel Markers Carrier
- 52 Stainless Steel Tige24

CABLE CLAMPS SYSTEM



53-62

CABLE CLAMPS SYSTEM

- 54 Self Adhesive Tie Mount
- 54 Saddle Type Tie Mount
- 55 Adjustable Cable Clamp
- 55 Adjustable Cable Clamp
- 56 Cable Tie Holders
- 56 R type Cable Clamp
- 57 Rubber Tube Clamps
- 58 Vinyl Coated Tube Clamps
- 59 Twist Ties
- 59 Standoff Twist Tie
- 59 Locking Wire Saddle
- 60 Strain Relief Bushing
- 61 Grommet (open)
- 61 Hole Plug
- 62 Snap Bushing
- 62 Snap Bushing(Open)

CABLE PROTECTION SYSTEM



63-76

CABLE PROTECTION SYSTEM

- 64 Cable Tidy(Attached Clip)
- 65 Spiral Wrapping Bands
- 66 Movable Bushing
- 67 PVC Insulating Tape
- 68 Cable Puller
- 69 Trunking and Pipe
- 70 Round Type Wiring Duct
- 71-72 PXC Wiring Duct(slotted)
- 73-74 PZC Wiring Duct(solid)
- 75 Magic tube
- 75-76 Button tube

STAINLESS STEEL CABLE TIES SYSTEM



77-90

STAINLESS STEEL CABLE TIES SYSTEM

- 79-80 Ball-Lock Uncoated Ties
- 81-82 Ball-Lock Polyester Coated Ties
- 83-84 L Type Polyester Coated Ties
- 85 Ball-Lock PVC Coated Ties
- 86 Releasable Uncoated Ties
- 87 Ladder Single-Lock Un coated Ties
- 88 Un coated Bands-MPS Ties
- 88 PVC Coated Bands-MPSJ Series
- 89 Buckles
- 90 Hand Tools



STAINLESS STEEL TIES SYSTEM

Ball-Lock Uncoated Ties

◎滚珠自锁式不锈钢光带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司

STAINLESS STEEL TIES SYSTEM

Ball-Lock Uncoated Ties

◎滚珠自锁式不锈钢光带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司



技术信息

- ◇ 产品材料: 不锈钢304或316
- ◇ 操作温度: -80°C~538°C
- ◇ 产品描述: 金属色带身及搭扣
- ◇ 防火等级: 阻燃
- ◇ 材料特性: 抗紫外线

产品特性

- ◇ 滚珠式自锁结构有利于加快安装速度。

Technical Information

- ◇ Material: Stainless Steel Grade 304 or 316
- ◇ Working Temp.: -80°C to 538°C
- ◇ Description: Entirely metallic
- ◇ Flammability: Fireproof
- ◇ Other Properties: UV-resistant.

Product Feature

- ◇ Ball-Lock type self-lock system, will speed the installation.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	

MGS-4.6*100	4.6	0.18	100	3.9	0.25	0.010	25	1.00	12.7	0.50	1000	225	LQB LQG
MGS-4.6*150			150	5.9			37	1.46					
MGS-4.6*200			200	7.9			50	1.97					
MGS-4.6*250			250	9.8			63	2.50					
MGS-4.6*300			300	11.8			76	3.00					
MGS-4.6*350			350	13.8			89	3.51					
MGS-4.6*400			400	15.7			102	4.00					
MGS-4.6*450			450	17.7			115	4.50					
MGS-4.6*500			500	19.7			128	5.00					
MGS-4.6*550			550	21.7			141	5.56					
MGS-4.6*650	650	25.6	167	6.58									
MGS-4.6*800	800	31.5	192	7.60									
MGS-7.9*150	7.9	0.31	150	5.9	0.25	0.010	37	1.46	12.7	0.50	2220	500	LQB LQG
MGS-7.9*200			200	7.9			50	1.94					
MGS-7.9*250			250	9.8			63	2.50					
MGS-7.9*300			300	11.8			76	3.00					
MGS-7.9*350			350	13.8			89	3.50					
MGS-7.9*400			400	15.7			102	4.00					
MGS-7.9*450			450	17.7			115	4.50					
MGS-7.9*500			500	19.7			128	5.00					
MGS-7.9*550			550	21.7			141	5.56					
MGS-7.9*600			600	23.6			154	6.07					
MGS-7.9*650			650	25.6			167	6.58					
MGS-7.9*800			800	31.5			193	7.60					
MGS-7.9*1000			1000	39.4			206	8.12					

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	
MGS-12*350	12	0.47	350	13.8	0.3	0.014	78	3.07	25.4	1.00	3115	700	LQA
MGS-12*400			400	15.7			102	4.02					
MGS-12*500			500	19.7			128	5.04					
MGS-12*600			600	23.6			154	6.06					
MGS-12*750			750	29.5			188	7.40					
MGS-12*900			900	35.4			228	8.98					
MGS-12*1100			1100	43.6			278	10.94					
MGS-15*350	15	0.59	350	13.8	0.3	0.014	78	3.07	25.4	1.00	4100	4100	LQA
MGS-15*450			450	17.7			108	4.25					
MGS-15*600			600	23.6			148	5.83					
MGS-15*750			750	29.5			184	7.24					
MGS-15*900			900	35.4			220	8.66					
MGS-15*1100			1100	43.3			272	10.71					

TOLERANCE®
offers the following
types of spray
products.



STAINLESS STEEL TIES SYSTEM

Ball-Lock Polyester Coated Ties

◎滚珠自锁式不锈钢喷带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司

STAINLESS STEEL TIES SYSTEM

Ball-Lock Polyester Coated Ties

◎滚珠自锁式不锈钢喷带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司



技术信息

- ◇金属材料: 不锈钢材质304或316
- ◇喷塑材料: 环氧树脂粉末, 尼龙11
- ◇喷塑类型: 半喷、全喷、彩喷、带身喷
- ◇操作温度: -80℃~150℃
- ◇产品描述: 黑色带身及金属色搭扣
- ◇防火等级: 阻燃
- ◇材料特性: 抗紫外线无卤无毒

产品特性

- ◇金属色搭扣有利于区别于黑色尼龙扎带;
- ◇喷塑带身可以提供额外的边缘保护, 并避免金属间的腐蚀。

Technical Information

- ◇Material: Stainless Steel Grade 304 or 316
- ◇Coating: Polyester/Epoxy, Nylon 11
- ◇WorkingTemp.: -80°C to 150°C
- ◇Description: Black Band with Metallic Buckle
- ◇Flammability: Fireproof
- ◇Other Properties: UV-resistant, Halogen free, non toxic

Product Feature

- ◇Metallic buckle helps to distinguish from black nylon cable ties.
- ◇Polyester coated band provide additional edge protection, prevent the corrosion between dissimilar materials.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	

MGP-4.6*100	4.6	0.18	100	3.9	0.35	0.014	25	1.00	12.7	0.50	710	160	LQB LQG
MGP-4.6*150			150	5.9			37	1.46					
MGP-4.6*200			200	7.9			50	1.97					
MGP-4.6*250			250	9.8			63	2.48					
MGP-4.6*300			300	11.8			76	2.99					
MGP-4.6*350			350	13.8			89	3.50					
MGP-4.6*400			400	15.7			102	4.02					
MGP-4.6*450			450	17.7			115	4.53					
MGP-4.6*500			500	19.7			128	5.04					
MGP-4.6*550			550	21.7			141	5.55					
MGP-4.6*650	650	25.6	167	6.57									
MGP-4.6*800	800	31.5	193	7.60									

MGP-6.4*150	6.4	0.25	150	5.9	0.35	0.014	37	1.46	12.7	0.50	900	200	LQB LQG
MGP-6.4*200			200	7.9			50	1.97					
MGP-6.4*250			250	9.8			63	2.50					
MGP-6.4*300			300	11.8			76	3.00					
MGP-6.4*350			350	13.8			89	3.51					
MGP-6.4*400			400	15.7			102	4.00					
MGP-6.4*450			450	17.7			115	4.50					
MGP-6.4*500			500	19.7			128	5.00					
MGP-6.4*550			550	21.7			141	5.56					
MGP-6.4*600			600	23.6			160	6.30					
MGP-6.4*800	800	31.5	193	7.60									

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	

MGP-7.9*150	7.9	0.31	150	5.9	0.35	0.014	37	1.46	12.7	0.50	1112	250	LQB LQG
MGP-7.9*200			200	7.9			50	1.97					
MGP-7.9*250			250	9.8			63	2.50					
MGP-7.9*300			300	11.8			76	3.00					
MGP-7.9*350			350	13.8			89	3.50					
MGP-7.9*400			400	15.7			102	4.00					
MGP-7.9*450			450	17.7			115	4.50					
MGP-7.9*500			500	19.7			128	5.00					
MGP-7.9*550			550	21.7			141	5.56					
MGP-7.9*600			600	23.6			154	6.07					
MGP-7.9*650			650	25.6			167	6.58					
MGP-7.9*800			800	31.5			193	7.60					
MGP-7.9*1000			1000	39.4			206	8.12					

MGP-12*350	12	0.47	50	13.8	0.45	0.018	78	3.07	25.4	1.00	2000	450	LQA
MGP-12*400			400	15.7			102	4.02					
MGP-12*500			500	19.7			128	5.04					
MGP-12*600			600	23.6			154	6.06					
MGP-12*750			750	29.5			188	7.40					
MGP-12*900			900	35.4			228	8.98					
MGP-12*1100			1100	43.3			278	10.94					
MGP-12.7*350	12.7	0.50	350	13.8	0.45	0.018	78	3.07	25.4	1.00	2000	450	LQA
MGP-12.7*400			400	15.7			102	4.02					
MGP-12.7*500			500	19.7			128	5.04					
MGP-12.7*600			600	23.6			154	6.06					
MGP-12.7*750			700	27.6			188	7.40					
MGP-12.7*900			900	35.4			228	8.98					
MGP-12.7*1100			1100	43.3			278	10.94					

MGP-15*350	15	0.59	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3000	675	LQA
MGP-15*450			450	17.7			108	4.25					
MGP-15*600			600	23.6			148	5.83					
MGP-15*750			750	29.5			184	7.24					
MGP-15*900			900	35.4			220	8.66					
MGP-15*1100			1100	43.3			272	10.71					
MGP-15.9*350	15.9	0.63	350	13.8	0.45	0.018	78	3.07	25.4	1.00	3000	675	LQA
MGP-15.9*450			450	17.7			108	4.25					
MGP-15.9*600			600	23.7			148	5.83					
MGP-15.9*750			750	27.6			184	7.24					
MGP-15.9*900			900	31.5			220	8.66					
MGP-15.9*1100			1100	39.4			272	10.71					

STAINLESS STEEL TIES SYSTEM

L Type Polyester Coated Ties

◎L型不锈钢喷带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司

STAINLESS STEEL TIES SYSTEM


L Type Polyester Coated Ties

◎L型不锈钢喷带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司

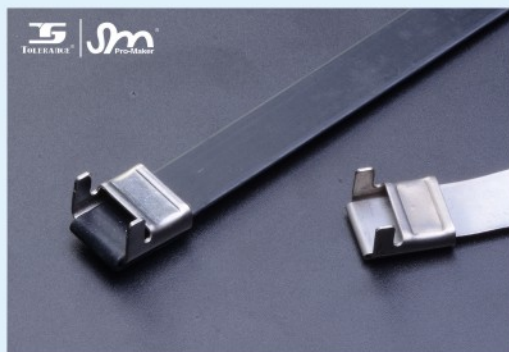

技术信息

- ◇金属材料: 不锈钢材质304或316
- ◇表面处理: 白钢、喷塑、包塑
- ◇操作温度: -80℃~150℃
- ◇产品描述: 黑色带身及金属色搭扣
- ◇防火等级: 阻燃
- ◇材料特隆: 抗紫外线, 无卤无毒

产品特性

- ◇喷塑带身可以保护产品边缘, 并防止产生金属间的蚀。

Technical Information

- ◇Material: Stainless Steel Grade 304 or 316
- ◇Coating: Polyester/Epoxy, Nylon 11
- ◇Working Temp.: -80°C to 150°C
- ◇Description: Black Strap with Metallic Buckle
- ◇Flammability: Fireproof
- ◇Other Properties: LN-resistant, Halogen freer non toxic

Product Feature

- ◇Coated band provides additional edge protection, prevent the corrosion between dissimilar materials.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool									
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs										
MGL-7.9*200	7.9	0.31	200	7.87	0.35	0.014	55	2.17	12.7	0.5	2220	500	LQG LQB LQD LQA									
MGL-7.9*300			300	11.81			90	3.54														
MGL-7.9*400			400	15.75			120	4.72														
MGL-7.9*500			500	19.69			150	5.91														
MGL-7.9*600			600	23.62			185	7.28														
MGL-7.9*700			700	27.56			215	8.46														
MGL-7.9*800			800	31.50			250	9.84														
MGL-7.9*1000			1000	39.37			312	12.20														
MGL-7.9*1200			1200	47.24			370	14.57														
MGL-10*300			10	0.39			300	11.81						0.4	0.016	90	3.54	19.05	0.75	2800	630	LQG LQB LQD LQA
MGL-10*400	400	15.75			120	4.72																
MGL-10*500	500	19.69			150	5.91																
MGL-10*600	600	23.62			185	7.28																
MGL-10*700	700	27.56			215	8.46																
MGL-10*800	800	31.50			250	9.84																
MGL-10*1000	1000	39.37			310	12.20																
MGL-10*1200	1200	47.24			370	14.57																
MGL-12*300	12	0.47			300	11.81	0.45	0.018	90	3.54	25.4	1	3115			700	LQG LQB LQD LQA					
MGL-12*400					400	15.75			120	4.72												
MGL-12*500			500	19.69	150	5.91																
MGL-12*600			600	23.62	185	7.28																
MGL-12*700			700	27.56	215	8.46																
MGL-12*800			800	31.50	250	9.84																
MGL-12*1000			1000	39.37	310	12.20																
MGL-12*1200			1200	47.24	370	14.57																

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool									
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs										
MGL-15*300	15	0.59	300	11.81	0.45	0.018	85	3.35	25.4	1	4100	920	LQG LQB LQD LQA									
MGL-15*400			400	15.75			120	4.72														
MGL-15*500			500	19.69			150	5.91														
MGL-15*600			600	23.62			185	7.28														
MGL-15*700			700	27.56			215	8.46														
MGL-15*800			800	31.50			250	9.84														
MGL-15*1000			1000	39.37			312	12.20														
MGL-15*1200			1200	47.24			375	14.76														
MGL-19*300			19	0.75			300	11.81						0.5	0.020	85	3.35	31.75	1.25	5000	1125	LQH LQA
MGL-19*400							400	15.75								120	4.72					
MGL-19*500	500	19.69			150	5.91																
MGL-19*600	600	23.62			185	7.28																
MGL-19*700	700	27.56			215	8.46																
MGL-19*800	800	31.50			250	9.84																
MGL-19*900	900	35.43			280	11.02																
MGL-19*1000	1000	39.37			310	12.20																
MGL-19*1100	1100	43.31			340	13.39																
MGL-19*1200	1200	47.24			375	14.76																
MGL-19*1300	1300	51.18	400	15.75																		
MGL-19*1400	1400	55.12	440	17.32																		

ZHEJIANG TOLERANCE ELECTRIC CO.,LTD

STAINLESS STEEL TIES SYSTEM

ZHEJIANG TOLERANCE ELECTRIC CO.,LTD

STAINLESS STEEL TIES SYSTEM

STAINLESS STEEL TIES SYSTEM

Ball-Lock PVC Coated Ties

◎ 滚珠自锁式不锈钢PVC包塑挤带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司



技术信息

- ◇金属材料: 不锈钢材质304或316
- ◇包塑材料: PVC电缆料
- ◇操作温度: -40℃~85℃
- ◇产品描述: 黑色带身及金属色搭扣
- ◇防火等级: 阻燃
- ◇材料特性: 抗紫外线

Technical Information

- ◇Material: Stainless Steel Grade 304 or 316
- ◇Coating: PVC
- ◇Working Temp.: -40°C to 85°C
- ◇Description: Black Band with Metallic Buckle
- ◇Flammability: Fireproof
- ◇Other Properties: UV-resistant

产品特性

- ◇金属色搭扣有利于区别于黑色尼龙扎带;
- ◇与喷塑带射目比, PVC包塑料带身更厚, 更软;
- ◇包塑带身可以提供额外的边缘保护, 并避免金属间的腐蚀。

Product Feature

- ◇Metallic buckle helps to distinguish from black nylon cable ties.
- ◇PVC coated band is thicker and softer, than polyester coated band.
- ◇Coated band provide additional edge protection, prevent the corrosion between dissimilar metals.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	

MGC-5.6*150	5.6	0.22	150	5.9	1.0	0.039	37	1.46	12.7	0.50	350	80	LQB LQG
MGC-5.6*200			200	7.9			50	1.94					
MGC-5.6*250			250	9.8			63	2.48					
MGC-5.6*350			350	13.8			89	3.50					
MGC-5.6*450			450	17.7			115	4.53					
MGC-5.6*600			600	23.6			154	6.06					
MGC-5.6*750			750	29.5			178	7.01					
MGC-5.6*900			900	35.4			229	9.02					

MGC-9.0*200	9	0.35	200	7.9	1.0	0.039	52	2.05	25.4	1.00	445	100	LQA
MGC-9.0*250			250	9.8			65	2.56					
MGC-9.0*300			300	11.8			78	3.07					
MGC-9.0*400			400	15.7			102	4.02					
MGC-9.0*500			500	19.7			128	5.04					
MGC-9.0*650			650	25.6			165	6.50					
MGC-9.0*800			800	31.5			204	8.03					
MGC-9.0*1000			1000	39.4			254	10.00					

MGC-16*350	16	0.63	350	13.8	1.2	0.047	89	3.50	25.4	1.00	889	200	LQA
MGC-16*450			450	17.7			115	4.53					
MGC-16*550			550	21.7			141	5.55					
MGC-16*700			700	27.6			179	7.05					
MGC-16*850			850	33.5			216	8.50					
MGC-16*1100			1100	43.3			280	11.02					

STAINLESS STEEL TIES SYSTEM


Releasable Uncoated Ties

◎ 可退式不锈钢光带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司

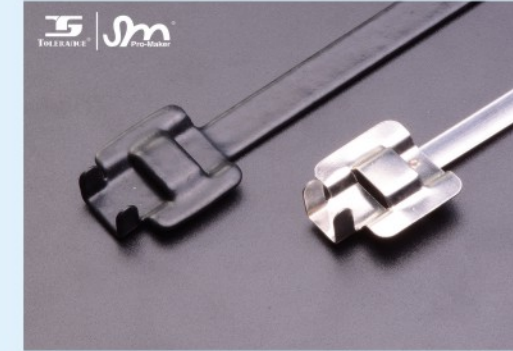

技术信息

- ◇金属材料: 不锈钢304或316
- ◇操作温度: -80℃~538℃
- ◇产品描述: 金属色、浸塑
- ◇防火等级: 阻燃
- ◇材料特性: 抗紫外线

Technical Information

- ◇Material: Stainless Steel Grade 304 or 316
- ◇Working Temp.: -80°C to 538°C
- ◇Description: Entirely Metallic, Dipping
- ◇Flammability: Fireproof
- ◇Other Properties: UV-resistant

产品特性

- ◇可退式、可重复使用;
- ◇安装快速便捷, 可手工操作, 尾部的狭槽可方便钩型工具的使用;
- ◇附加的耳朵可以被弯曲, 用于提高拉力;
- ◇单身可以穿过搭扣两次, 增大拉力强度。

Product Feature

- ◇Releasable and Reusable.
- ◇Fast, easy and reliable installation.
- ◇Slots at the end of the tie allow the use of a hook-type tool.
- ◇Additional ears can be bent back over the fastened tie to increase the tensile strength.
- ◇Strap can go through the buckle twice for higher tensile strength.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	

MGR-6.3*152	6.3	0.25	152	5.98	0.38	0.015	38	1.50	19	0.75	334/1334	75/300	LQB LQG
MGR-6.3*229			229	9.02			63	2.48	31.5	1.24			
MGR-6.3*305			305	12.01			86	3.39	43	1.69			
MGR-6.3*457			457	17.99			137	5.39	68.5	2.70			
MGR-6.3*610			610	24.02			185	7.28	92.5	3.64			
MGR-9.6*152			9.6	0.38			152	5.98	0.38	0.015			
MGR-9.6*229	229	9.02			63	2.48	31.5	1.24					
MGR-9.6*305	305	12.01			86	3.39	43	1.69					
MGR-9.6*457	457	17.99			137	5.39	68.5	2.70					
MGR-9.6*610	610	24.02			185	7.28	92.5	3.64					
MGR-9.6*762	762	30.00			231	9.09	115.5	4.55					
MGR-9.6*914	914	35.98			280	11.02	140	5.51					

STAINLESS STEEL TIES SYSTEM

Ladder Single-Lock Un coated Ties

◎ 阶梯型单钩锁紧式不锈钢光带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司



技术信息

- ◇金属材料: 不锈钢304或316
- ◇操作温度: -80℃~538℃
- ◇产品描述: 金属色、喷塑
- ◇防火等级: 阻燃
- ◇材料特睦: 抗紫外线

产品特性

- ◇强力的自锁系统, 不需要多余的卷边和折叠操作;
- ◇搭扣简单实用, 易于操作;
- ◇位于尾部大的槽, 方便钩型工具的使用。

Technical Information

- ◇Material: Stainless Steel Grade 304 or 316
- ◇Working Temp.: -80℃ to 538℃
- ◇Description: Entirely Metallic, Spray
- ◇Flamma bility: Fireproof
- ◇Other Properties: UV-resistant.

Product Feature

- ◇Strong self-locking mechanism(Pawl and ratchet) saves time on installation.
- ◇Flat and low profile head(no sharp edger) for easy installation.
- ◇Larger slot at the end, allows the use of a hook-type tool.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		最大捆绑直径 Max.Bundle Dia.		最小捆绑直径 Min.Bundle Dia.		最小拉力 Min.Tensile Strength		配套工具 Recommended Installation Tool
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	N	lbs	
MDS-4.6*150	4.6	0.18	150	5.91	0.3	0.012	40	1.57	12.7	0.50	488	110	LQB LQG
MDS-4.6*225			225	8.86			62	2.44					
MDS-4.6*300			300	11.81			81	3.19					
MDS-4.6*400			400	15.75			113	4.45					
MDS-4.6*450			450	17.72			127	5.00					
MDS-4.6*550			550	21.65			159	6.26					
MDS-4.6*600			600	23.62			176	6.93					
MDS-4.6*700			700	27.56			207	8.15					
MDS-4.6*800			800	31.50			238	9.37					
MDS-7*150			7.0	0.28			150	5.91					
MDS-7*225	225	8.86			62	2.44							
MDS-7*300	300	11.81			81	3.19							
MDS-7*400	400	15.75			113	4.45							
MDS-7*450	450	17.72			127	5.00							
MDS-7*550	550	21.65			159	6.26							
MDS-7*600	600	23.62			176	6.93							
MDS-7*700	700	27.56			207	8.15							
MDS-7*800	800	31.50			238	9.37							
MDS-12*150	12	0.47			150	5.91	0.38	0.015	40	1.57	25.4	1.00	1000
MDS-12*225			225	8.86	62	2.44							
MDS-12*300			300	11.81	81	3.19							
MDS-12*400			400	15.75	113	4.45							
MDS-12*450			450	17.72	127	5.00							
MDS-12*550			550	21.65	159	6.26							
MDS-12*600			600	23.62	176	6.93							
MDS-12*700			700	27.56	207	8.15							
MDS-12*800			800	31.50	238	9.37							

STAINLESS STEEL TIES SYSTEM

Un coated Bands-MPS Ties

◎ 不锈钢光带盘带

Pro-Fix

Wiring Accessories

浙江特伦斯电气有限公司



技术信息

- ◇金属材料: 不锈钢201,304或316
- ◇温度范围: -80℃~538℃
- ◇颜色: 金属色
- ◇常规成卷长度为50M, 25M.
- ◇各种规格长度皆可定制, 请联系风帆销售人员。
- ◇选用何种配套安装工具, 请查看扎带工具介绍。
- ◇订购产品时, 请告知所需的不锈钢材质要求。

Technical Information

- ◇Material: Stainless Steel Grade 201, 304 or 316
- ◇Working Temp.: -80℃ to 538℃
- ◇Colour: Metallic
- ◇Supplied in reels of 165ft (50M), 82.5ft (25M).
- ◇Other size available, please contact with FENGFAN's Customer Service
- ◇For information on installation, refer to the Hand Tools page.
- ◇Please add the material grade by the end of the item numbers.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		标准包装 Paking		使用搭扣 Suitble Buckles	配套工具 Hand Tool
	mm	inch	M	Feet	mm	inch	M/box	Boxes/Ctn.		
MPS-3.8	3.8	0.150	50	165.0	0.26	0.01	25	20	BKG-3.8	LQB LQB LQA LQH
MPS-4.6	4.6	0.181	50	165.0	0.26	0.01	25	20	BKG-4.6	
MPS-6.4	6.4	0.252	50	165.0	0.26/0.51	0.01/0.02	50	20	BKG-6.4/BKG-6.4	
MPS-7.9	7.9	0.311	50	165.0	0.26	0.01	25	20	BKG-7.9;BKG-7.9	
MPS-9.6	9.6	0.375	50	165.0	0.63	0.025	50	20	BKG-9.6	
MPS-10	10	0.39	50	165.0	0.30	0.012	50	20	BKG-10;BKG-10	
MPS-12	12	0.47	25	82.5	0.35	0.014	25	20	BKG-12;BKO-12;BKG-12	
MPS-12.7	12.7	0.50	25	82.5	0.35/0.76	0.014/0.03	25	20	BKL-12.7;BKG-12.7/BKW-12.7	
MPS-15	15	0.59	25	82.5	0.35	0.014	25	20	BKL-15;BKO-15;BKG-15	
MPS-15.9	15.9	0.63	25	82.5	0.35/0.76	0.014/0.03	25	20	BKG-15.9;BKG-15.9/BKW-15.9	
MPS-19.05	19.05	0.75	25	82.5	0.4/0.76	0.016/0.03	25	20	BKL-19;BKW-19.05	

Stainless Steel PVC Coated Bands-MPSJ Series

◎ 不锈钢PVC挤带盘带



技术信息

- ◇金属材料: 不锈钢304或316
- ◇包塑材料: PVC
- ◇操作温度: -40℃~85℃
- ◇颜色: 黑色

Technical Information

- ◇Material: Stainless Steel Type 304 or 316
- ◇Coating: PVC
- ◇Working Temp.: -40℃ to 85℃
- ◇Colour: Black

产品特性

- ◇保证石油天然气输送的安全性;
- ◇低吸水性;
- ◇优良的捆绑拉力;
- ◇保护裸露的金属表面;
- ◇同PPA相比, PVC可以降低成本;
- ◇可以提供额外的边缘保护;
- ◇防止金属间的腐蚀。


Product Feature

- ◇Safety in Oil & Gas Carriers.
- ◇Low Moisture Absorption.
- ◇Excellent Banding strength.
- ◇Safeguard the 'bare metal'.
- ◇PVC coating will reduce the cost, than PPA Coating.
- ◇Provide additional edge protection.
- ◇Prevent corrosion between dissimilar metals.

规格型号 Item No.	宽度 Width		长度 Length		厚度 Thickness		标准包装 Paking		使用搭扣 Suitble Buckles	配套工具 Hand Tool
	mm	inch	M	Feet	mm	inch	M/box	Boxes/Ctn.		
MPSJ-5.6	5.6	0.22	50	165.0	1.0	0.039	50	20	BKG-5.6	LQB LQB LQA LQH
MPSJ-9	9	0.35	50	165.0	1.0	0.039	25	20	BKL-9;BKG-9	
MPSJ-13	12	0.51	25	82.5	1.1	0.043	25	20	BKL-13;BKO-13	
MPSJ-16	16	0.63	25	82.5	1.1	0.043	25	20	BKL-16;BKO-16;BKG-16	

技术信息

- ◇金属材料: 不锈钢201, 304或316
- ◇温度范围: -80℃-538℃
- ◇颜色: 金属色

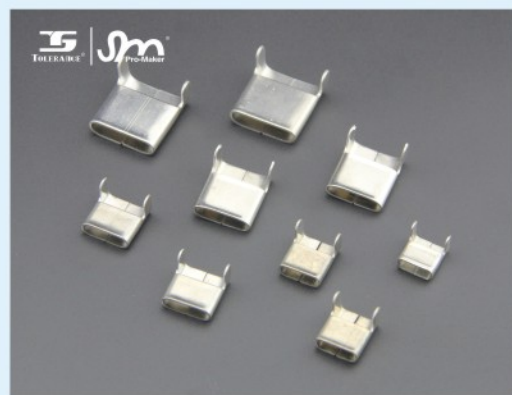


Technical Information

- ◇Material: Stainless Steel Grade 201, 304 Or 316
- ◇Working Temp.: -80℃ to 538℃
- ◇Colour: Metallic

®L Type Buckles - BKL Series

规格型号 Item No.	宽度 Width		厚度 Thickness	标准包装 Paking
	mm	inch		
BKL-8	8	0.31	0.6	100
BKL-10	10	0.39	0.6	100
BKL-12	12	0.47	0.65	100
BKL-16	16	0.63	0.76	100
BKL-19	19	0.75	0.85	100

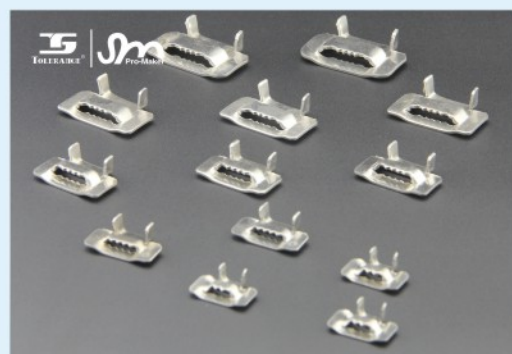

®Woolf Teeth Type Buckles - BKW Series

规格型号 Item No.	宽度 Width		厚度 Thickness	标准包装 Paking
	mm	inch		
BKW-6.4	6.4	0.25	1.0	100
BKW-9.6	9.6	0.38	1.0	100
BKW-12.7	12.7	0.50	1.0	100
BKW-15.9	15.9	0.63	1.0	100
BKW-19.1	19.1	0.75	1.5	100

Plastic spraying fluidization process equipment



产品编号: LBG\Part Number: LBG



工具名称: Tool type:	LQG扎带枪 LQG Cable Tie Gun
适用扎带型号: For type of cable tie:	不锈钢扎带(3.8mm-9mm) Stainless Steel Ties
产品特性: Product Feature:	<ul style="list-style-type: none"> ◇自动工具, 可以单人安装。 ◇单向进入扎带枪, 可以即刻固定扎带和工具。 ◇控制拉力, 完全调整到所要求的拉力值。 ◇安装完毕后, 自动剪切。 ◇移除多余的带身。 ◇Automatic gun, easy to install with single hand operation. ◇Cable tie side entry, for immediate positioning of the tie and the tool. ◇Controlled tension, fully adjustable to achieve desired tension. ◇Automatically cut off when tension is reached. ◇Easy removal of excess tie.

产品编号: LQG\Part Number: LQG



工具名称: Tool type:	LQB紧固器 LQB Tensioning Tool
适用扎带型号: For type of cable tie:	不锈钢扎带(3.8mm-9mm) Stainless Steel Ties
产品特性: Product Feature:	<ul style="list-style-type: none"> ◇单手便可操作工具。 ◇收紧和切断。 ◇移除多余的带身。 ◇单向进入工具, 可以即刻固定扎带和工具。 ◇坚固, 轻便, 简单操作。 ◇提供机械力优势。 ◇One hand operated tool. ◇Tension and cut-off. ◇Easy removal of the excess tie. ◇Cable tie side entry for immediate positioning of tie and tool ◇Rugged, lightweight, easy to operate Plier type tool. ◇Provide mechanical advantage.

产品编号: LQA\Part Number: LQA



工具名称: Tool type:	LQA紧固器 LQA Strapping Tool
适用扎带型号: For type of cable tie:	不锈钢扎带(8mm-16mm) Stainless Steel Ties
产品特性: Product Feature:	<ul style="list-style-type: none"> ◇收紧和切断。 ◇可调节的收紧控制柄。 ◇可以轻松移除多余的带身。 ◇Tension and cut off. ◇Adjustable tension control ◇Easily remove the excess straps.

产品编号: DQH\Part Number: DQH



工具名称: Tool type:	LQH紧固器 LQH Crimping Tool
适用扎带型号: For type of cable tie:	不锈钢扎带; 不锈钢盘带(8mm-16mm) Stainless Steel Ties; Stainless Steel Bands
产品特性: Product Feature:	<ul style="list-style-type: none"> ◇收紧和切断。 ◇弹簧夹子控制杆可以增强使用的简易性和人工收紧性能。 ◇收紧力可以达到3300磅。 ◇当夹紧后, 切掉尾巴。 ◇Tension and cut off. ◇Spring loaded gripper lever improves ease of use and hand tensioning. ◇For tensions over 3,300 lbs of force application. ◇Cut off the tail when the clamp is set up.